



DO NOT SCALE DRAWING


受光面側
LIGHTING SIDE

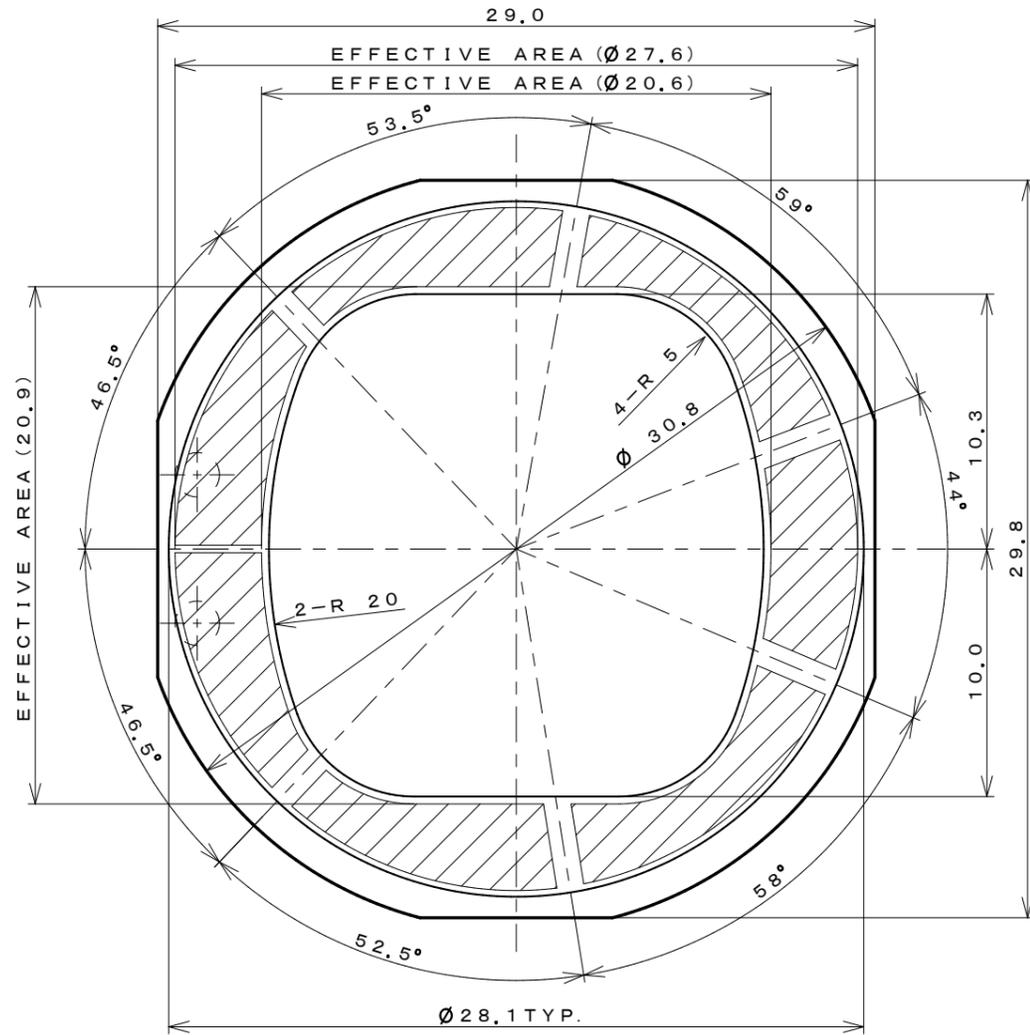

厚み (端子部除く)
THICKNESS
(EXCEPT ELECTRODE)

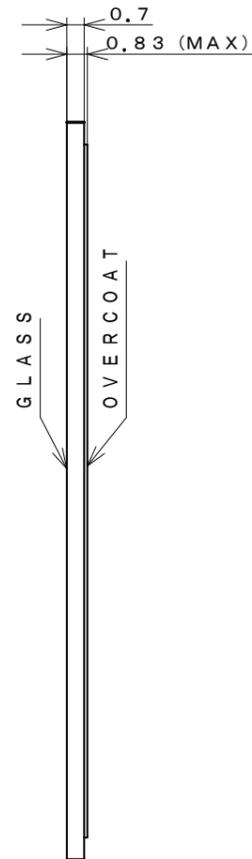

裏面側
BACK SIDE

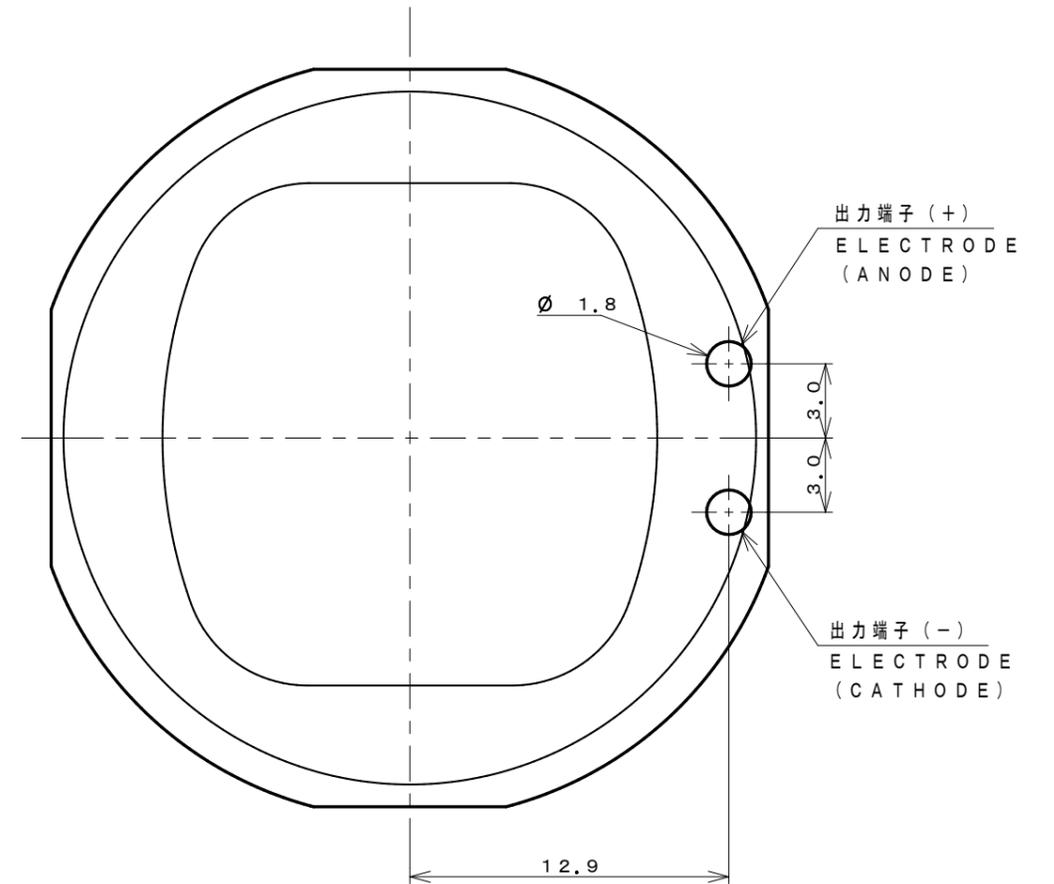

NOTE
GENERAL TOLERANCE : ±0.05


SPECIFICATIONS (at 200Lx, FL, 25°C)

OPEN CIRCUIT VOLTAGE	TYPICAL 4.2 V	
SHORT CIRCUIT CURRENT	TYPICAL 4.0 µA	
OPERATION	TYPICAL 3.0V - 3.3 µA	MINIMUM 3.0V - 2.8 µA

DR.		DATE Jul. 1, 2019	△		
CHK.		ORIGINAL DRAWING	△		
ENG.		TOLERANCE DECIMALS FRACTIONS ANGLES	SYM	DATE	DESCRIPTION No.
APP.		DIMENSION : mm SCALE 3.5 : 1	REVISIONS		
			FINISH	TITLE GLASS SOLAR CELL	
			MATERIAL	MODEL AM-2709	
			WEIGHT		
			NO.	TENTATIVE NO. B278-E	

Current- Voltage Characteristics of a cell for watch

at 200Lx FL 25°C

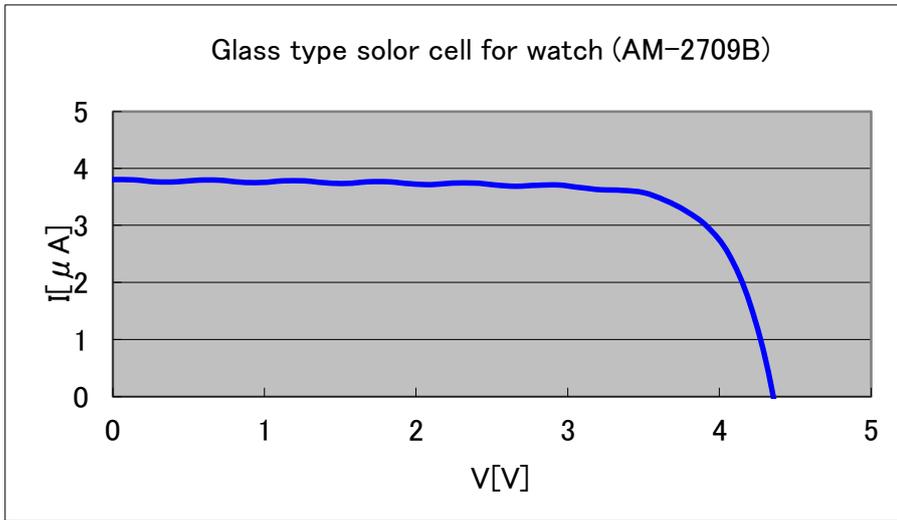

at 200lux FL ^{※1} 25°C

Typical	Voc[V]	Iope(3.0V)[μ A]
	4.2	3.3

※1 fluorescent light

The data are meant to show a sample data only , not intended to guarantee the characteristics