




1 2 3 4 5 6

Light Receiving Side

Back Side

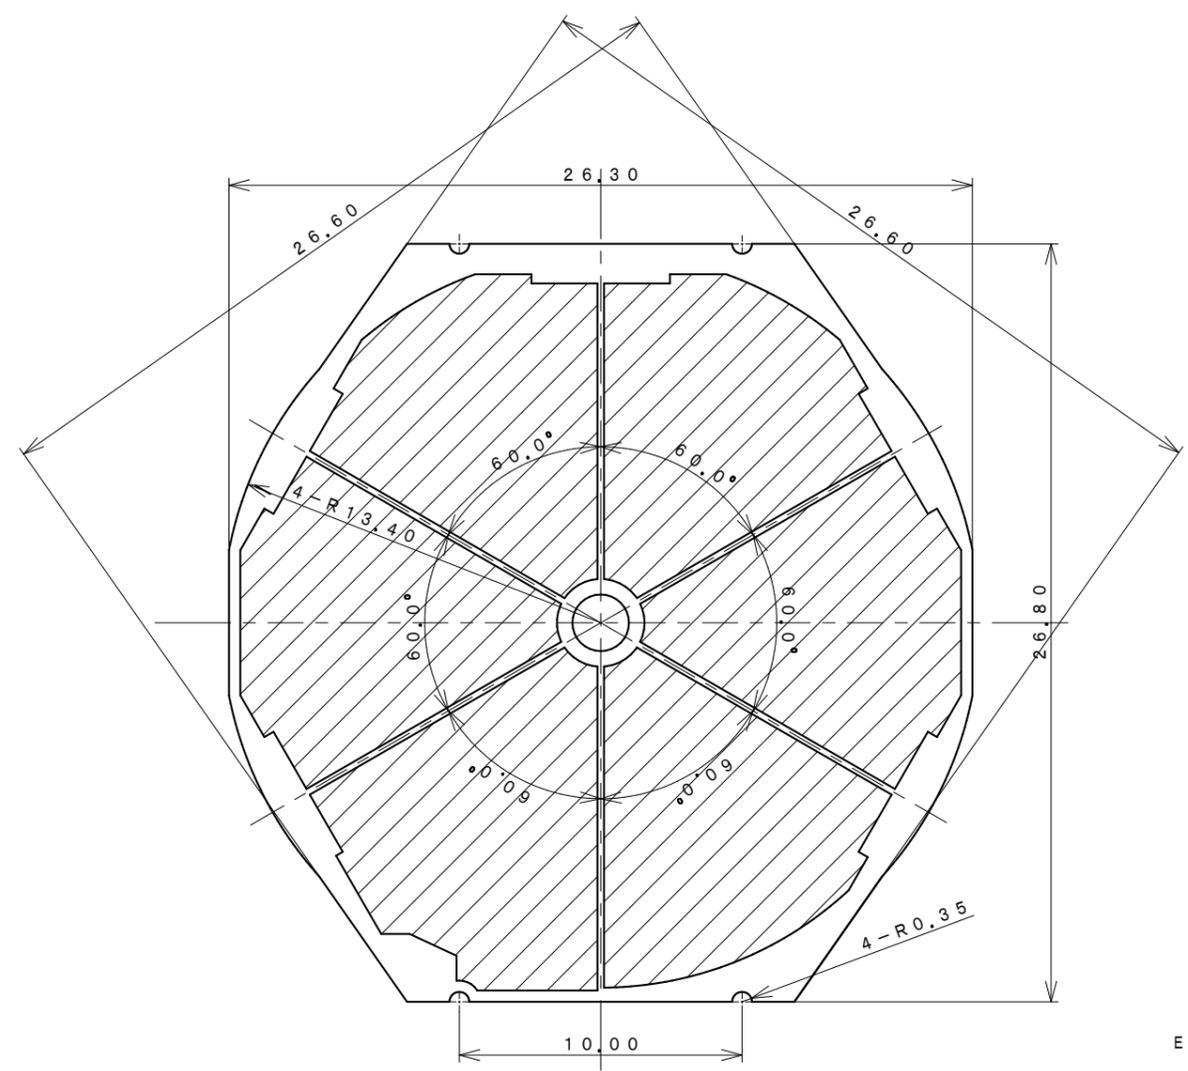

Effective Area

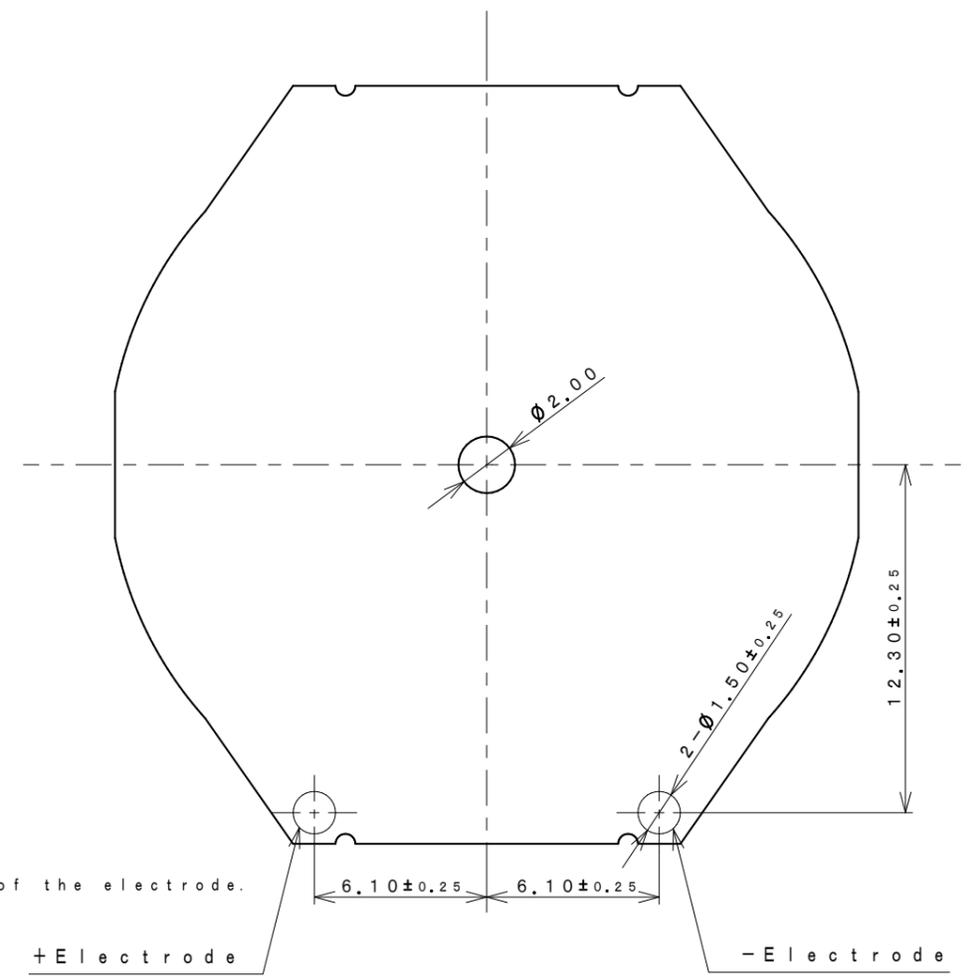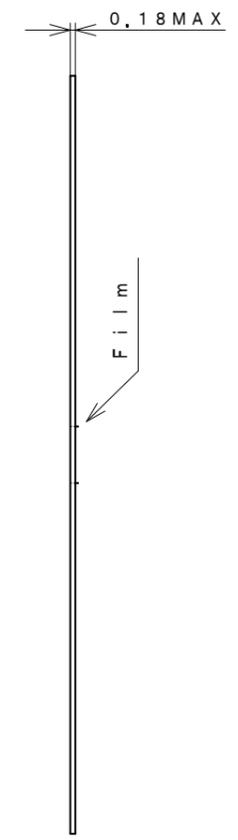

Except bump and part of the electrode.

+ Electrode

- Electrode

GENERAL TOLERANCE : ±0.1
WARP : 2.0 MAX

DO NOT SCALE DRAWING


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

SPECIFICATIONS (at 200Lx)			
	TYPICAL		
OPEN CIRCUIT VOLTAGE (V)	4.2V		
SHORT CIRCUIT CURRENT (μA)	15.3 μA		
OPERATION (μA)	TYPICAL 2.6V-14.6 μA	MORE THAN	2.6V-12.1 μA

DR.		DATE May. 15, 2019			
CHK.		ORIGINAL DRAWING			
ENG.		TOLERANCE DECIMALS FRACTIONS ANGLES	SYM	DATE	DESCRIPTION
APP.		DIMENSION : mm SCALE 3.5:1	REVISIONS		
			FINISH	TITLE FILM SOLAR CELL	
			MATERIAL FILM	MODEL	
			WEIGHT		
			NO.	TENTATIVE NO. AT-26LOB	

Current- Voltage Characteristics of a cell for watch

at 200Lx FL 25°C

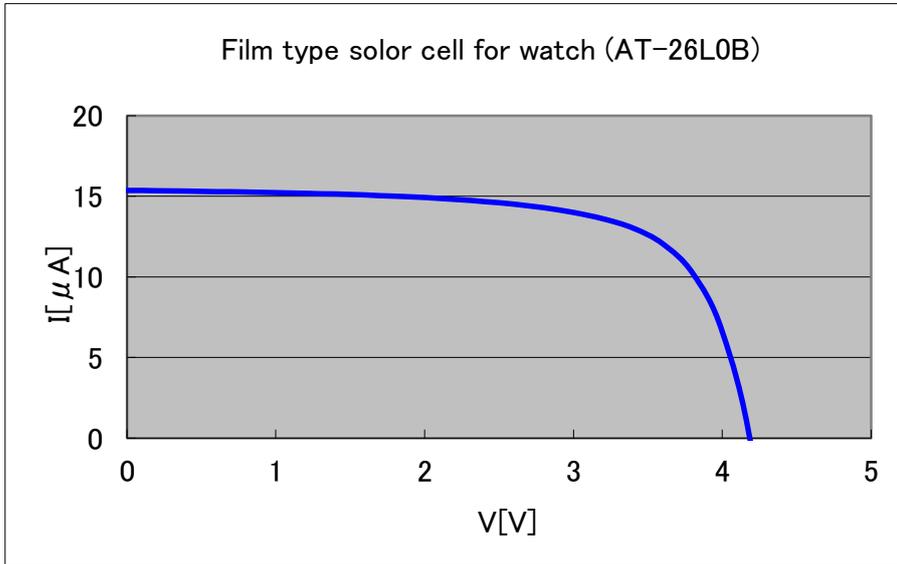

at 200lux FL^{※1} 25°C

Typical	Voc[V]	Iope(2.6V)[μ A]
	4.2	14.6

※1 fluorescent light

The data are meant to show a sample data only , not intended to guarantee the characteristics