


## アモルファスシリコン太陽電池 仕様

Model : AM-1820C

## 1. Outside dimensions 外形寸法

Light Receiving Side (受光面)

Overcoat Side (オーハークート面)

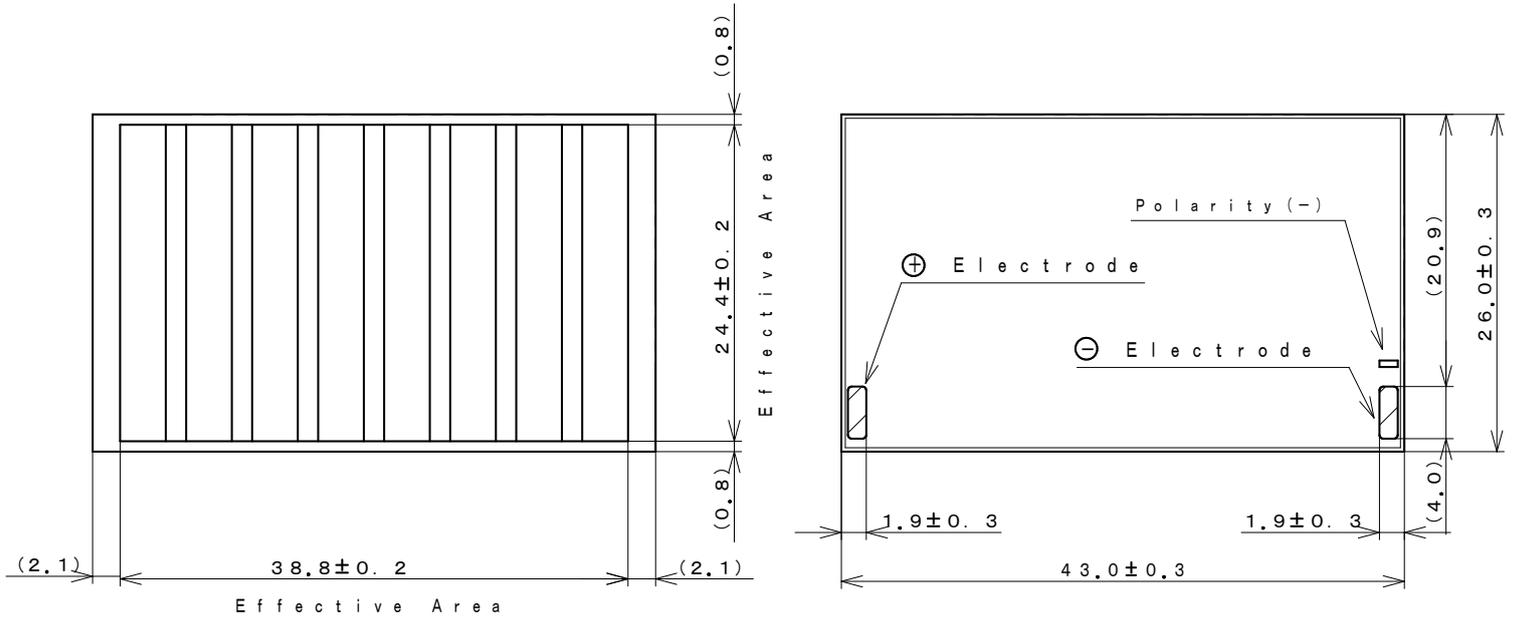

(dimension : mm)

## Note

Glass Substrate Thickness (ガラス基板厚) : 1.1mm ± 0.1

Module Thickness (モジュール厚) : 1.3mm MAX

Accepts normal soldering for bending

(一般の半田を使用してリット線付けが可能です。)

## 2. Rated Specifications (at 25℃)

Item	Specifications (Initial)
2.1 Open circuit voltage : Voc 開放電圧	Typical 5.0V at 200Lx FL
2.2 Short circuit Current : Isc 短絡電流	Typical 14.8 μA at 200Lx FL
2.3 Operating Voltage & Operating Current : Vope - Iope 動作特性	Typical 2.6V - 3.3 μA at 50Lx FL
	Minimum 3.0V - 10.6 μA at 200Lx FL
	Typical 3.0V - 13.8 μA at 200Lx FL
2.5 Working temperature range : Topr 動作温度範囲	-10 to 60℃
2.6 Storage temperature range : Tstg 保存温度範囲	-20 to 70℃

FL: White Fluorescent Light



アモルファスシリコン太陽電池 仕様

Model : AM-1820CA

1. Outside dimensions 外形寸法

Light Receiving Side (受光面)

Overcoat Side (オーバーコート面)

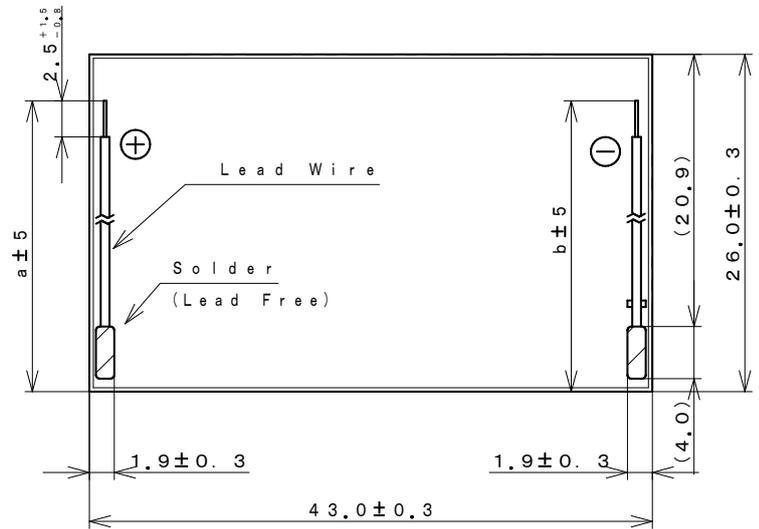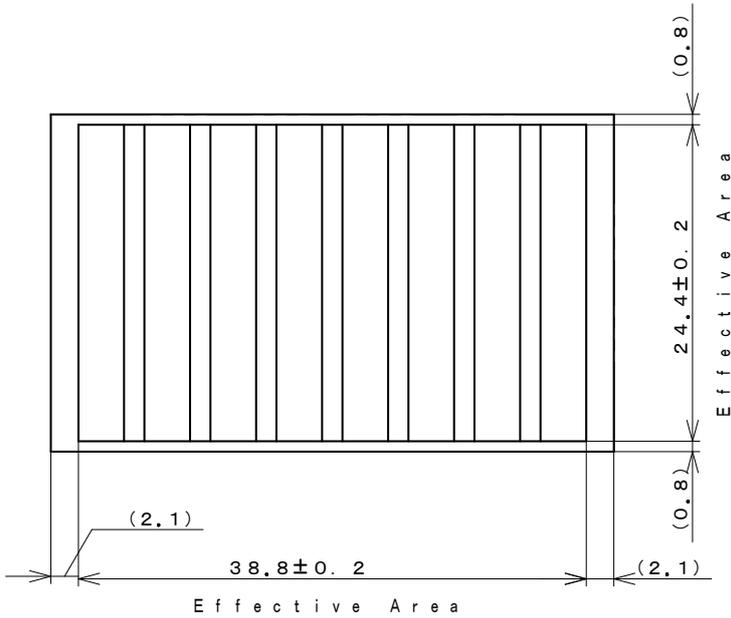

(dimension: mm)

Lead Wires : AWG28	
a : 51	b : 51

Note

Glass Substrate Thickness (ガラス基板厚) : 1.1mm±0.1

Module Thickness (モジュール厚) : 1.3mmMAX

Wire-Solder thickness : 2.5mmMAX (including Module)  
(リード線半田付け部厚)

2. Rated Specifications (at 25℃)

Item	Specifications (Initial)
2.1 Open circuit voltage : Voc 開放電圧	Typical 5.0V at 200Lx FL
2.2 Short circuit Current : Isc 短絡電流	Typical 14.8μA at 200Lx FL
2.3 Operating Voltage & Operating Current : Vope-Iope 動作特性	Typical 2.6V - 3.3μA at 50Lx FL
	Minimum 3.0V - 10.6μA at 200Lx FL
	Typical 3.0V - 13.8mA at 200Lx FL
2.5 Working temperature range : Topr 動作温度範囲	-10 to 60℃
2.6 Storage temperature range : Tstg 保存温度範囲	-20 to 70℃

FL: White Fluorescent Light


# I - V Characteristics

REFERENCE

1.Model : AM-1820

2.Outside Dimension : 43.0mm × 26.0mm

FL:White Fluorescent Light

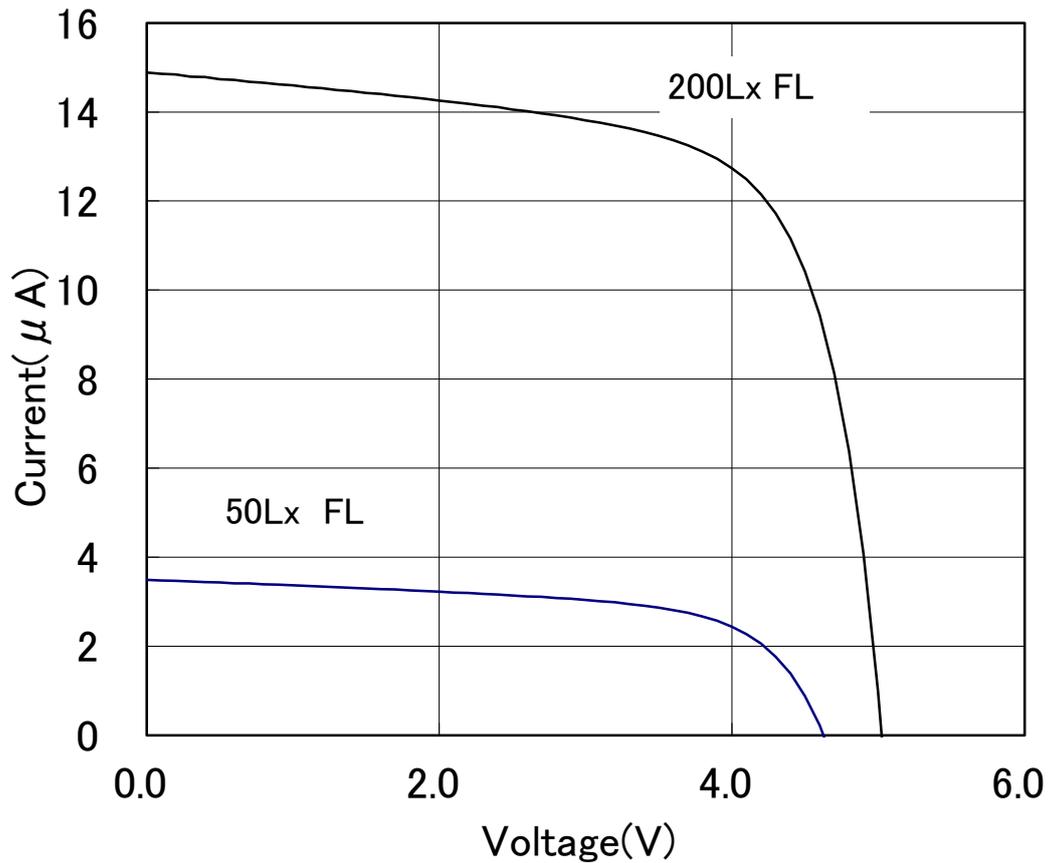

\*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

\*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.

**Amorton**

2026/2/27

# 出力の照度依存特性


REFERENCE

## Dependence of Output on Illumination

1.Model : AM-1820

2.Outside Dimension : 43.0mm × 26.0mm

FL:White Fluorescent Light

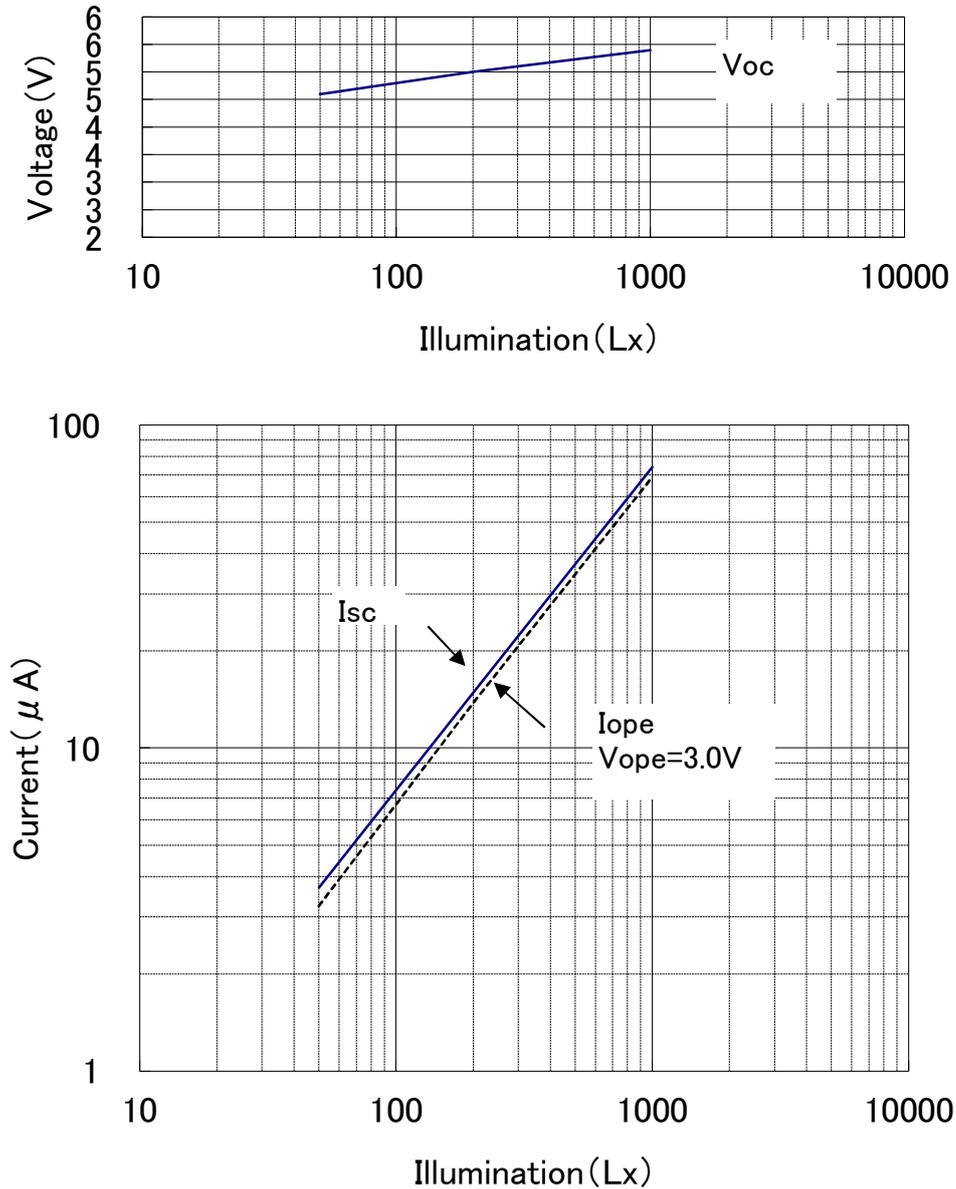

\*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

\*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.

**Amorton**

# 出力の温度依存特性



REFERENCE

Dependence of Output on Temperature

1.Model : AM-1820

2.Outside Dimension : 43.0mm × 26.0mm

at 200Lx White Fluorescent Light

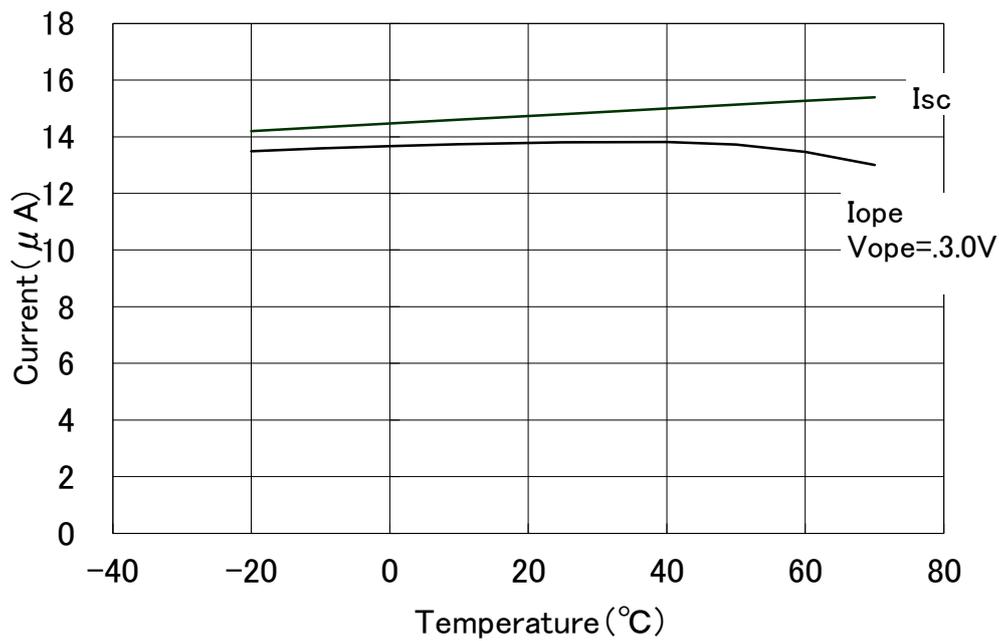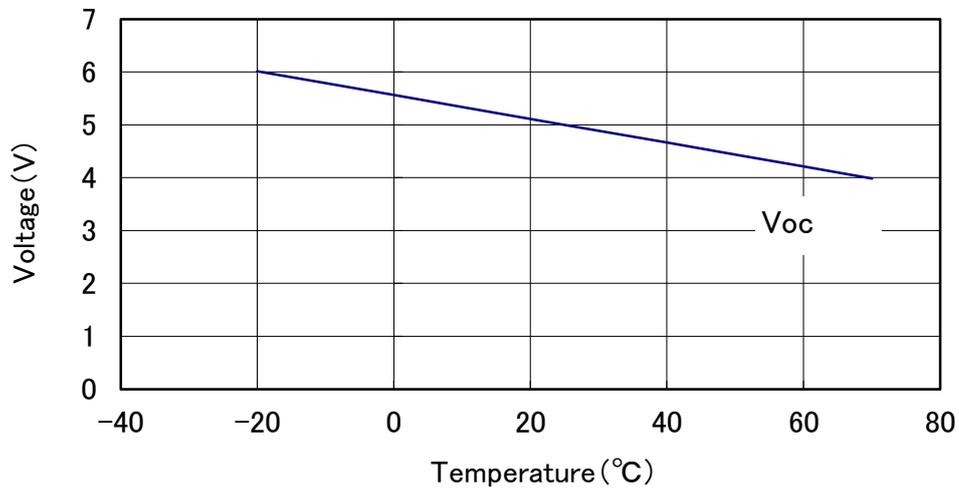

\*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

\*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.

**Amorton**

2026/2/27